

Type **Ladenko CONCEPT** Cavity Sliding Door System

General The **CONCEPT** is a heavy duty architectural cavity sliding door system which has been designed to offer an architectural flush finish look to your sliding door. It has a discrete profile, with no hanger plates or fixing screws visible above the door and is suitable for all domestic, commercial and industrial building projects.

Builders Many builders prefer to install the Ladenko cavity sliding door system because of its ease of installation which includes pre-cut and pre-drilled quality components, and smooth trouble free operation of the door system which ensures less 'on the job' installation time and better customer satisfaction.

Architects Whether your project is casual or urbane, sophisticated or contemporary or even heritage, we can assure you that our attention to detail results in a high quality product with an assurance of reliability. The Ladenko cavity sliding door system is a fully approved, tested and recommended design, manufactured in Australia to certified design standards.

Standard Sizes
Single or Double

Door Height	Door Width	Door Height	Door Width
2040	520	2340	520
2040	620	2340	620
2040	720	2340	720
2040	770	2340	770
2040	820	2340	820
2040	870	2340	870
2040	920	2340	920
2040	1020	2340	1020
2040	1070	2340	1070
2040	1200	2340	1200
2040	1220	2340	1220

Custom Built Sizes Custom built sizes are available in any height and width for single or double doors

Door Weight The **CONCEPT** is designed to carry doors weighing up to and including 120kg. Special request for doors weighing up to 240kg can be accommodated

Soft Closer Available

Door Release Available, Jexis door release

Special Doors Doors to match the Hercules cavity slider are available - special request

Head Track One piece heavy duty pre-drilled extruded aluminium dual rail track, rated at 120kg

Warranty 10 Years

Single or Double Both single and double cavity sliders are available in standard sizes, see the above table

Trim Finish Architrave (standard), P50 shadow line or P25 stopping angle & Flush Trim finish

No Closing Jamb Available - special request

EZY Jamb EZY Jamb is available - special request

Full Height Available as less than full height or full height units by special request

Pelmet Yes, depth is 15mm and pre-drilled. 10 – 15mm gap from top of door to track

Door Protrusion Zero, in fully open position. 60mm protrusion available if requested

Door Hardware By special request: Large range available

Fitting Kit Installation/fitting kit supplied with each Concept cavity sliding door system

Fitting Instructions Supplied with each unit


On-Site Installation By special request: This can be arranged, contact: customer.support@ladenko.com.au

Technical Details Contact: customer.support@ladenko.com.au

Cost Contact: sales@ladenko.com.au

Special Orders Delivery of special orders is 8-10 days from signing of the production dimension sheet

Delivery Australia wide

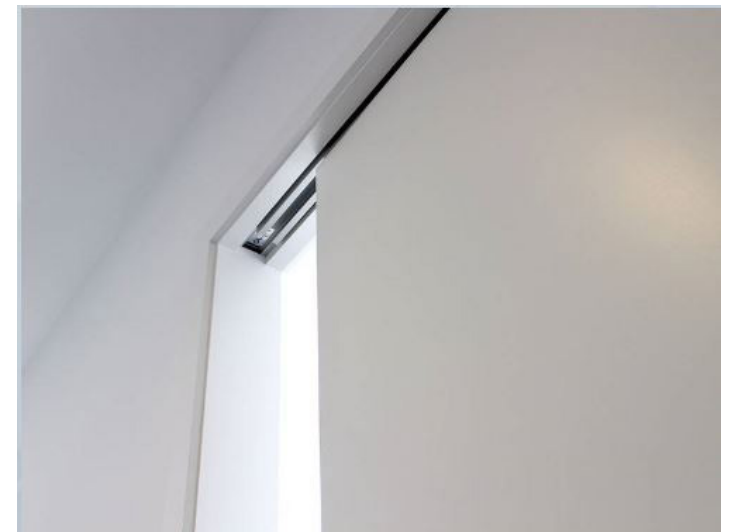

Heavy duty dual rail extruded aluminium track



Quick release hanger system plus pelmets pre-drilled and cut to length

Any size cavity sliding door system either single or double can be custom made for any application

End loading mounting plates make it quick and easy to fit and remove door

Single piece extruded aluminium head-track system ensures smooth and quiet operation

Full KDHW frame for strength and stability, quick and easy to install

Soft closer is available as an option for super quiet and gentle closing

Select varnish grade kiln dried Tasmanian hardwood jambs and pelmets

Aluminium or steel split jamb angle supports which can be fitted with optional brush seals if requested

Tescella heavy duty soft closer tested and approved

Standard door sizes range from 2040 x 520 up to 2040 x 1220. Special oversize inquiries are welcome

Builders prefer to install the Ladenko cavity sliding door system because of its quality components, ease of installation and smooth operation which ensures customer satisfaction. Each cavity sliding door pocket is made from select grade Tasmanian kiln dried hardwood, resulting in absolute quality and superior finish. Each cavity sliding door unit comes with a 10 year warranty.

Hercules 80 Roller Assembly

All Ladenko cavity sliding door systems can be manufactured to suit:

- Reveals and architraves
- EZY-Jamb flush trim kits
- P50 Shadow line or P25 stopping bead
- No closing jamb design

KDHW = Kiln dried hardwood

KDHW provides much better durability than pine or other soft woods and enhances stability in wet areas

The Ladenko cavity sliding door system is a fully approved, tested and recommended design, manufactured in Australia to certified design standards.

A WHOLE NEW WORLD OF SPACE SAVING INNOVATIVE POSSIBILITIES ARE WAITING FOR YOU

Contact us today: Telephone 1300 360 181 or sales@ladenko.com.au