


Ladenko Classic Zero Clearance Cavity Sliding Door System.

A modern floor to ceiling architectural cavity sliding door system with no pelmet.

General	The Ladenko classic Zero Clearance™ range has been designed to carry doors weighing up to 180kg. The clearance between the head track and the top of the door is approximately 3-5mm which means there are no hanger plates or screws protruding above the top edge of the door. As a door guide, we supply a guide channel which is fitted into the bottom of the door and a roller guide which is fitted inside the cavity sliding door pocket.
Builders	Many builders prefer to install the Ladenko cavity sliding door system because of its ease of installation which includes pre-cut and pre-drilled quality components, and smooth trouble free operation of the door system which ensures less 'on the job' installation time and better customer satisfaction.
Architects	Whether your project is casual or urbane, sophisticated or contemporary or even heritage, we can assure you that our attention to detail results in a high quality product with an assurance of reliability. The Ladenko cavity sliding door system is a fully approved, tested and recommended design, manufactured in Australia to certified design standards.
Custom Built Sizes	Custom built sizes are available for single or double doors
Door Weight	The ladenko Classic is designed to carry doors weighing up to and including 180kg. Special request for doors weighing up to 240kg can be accommodated
Soft Closer	Available
Door Release	Available, Jexis door release
Special Doors	Doors to match the Ladenko Classic cavity slider are available - special request
Head Track	One piece heavy duty pre-drilled extruded aluminium head track, rated up to 180kg
Warranty	10 Years
Single or Double	Both single and double cavity sliders are available in many different custom sizes.
Trim Finish	Architrave, Square Set, P50 shadow line and P25 stopping angle finish
No Closing Jamb	Available - special request
EZY Jamb	EZY Jamb is available - special request
Full Height	Available as full height (floor to ceiling) design
Pelmet	No Pelmet necessary
Door Protrusion	No protrusion. Door is flush with split jamb when fully open
Door Hardware	By special request:
Fitting Kit	Installation/fitting kit supplied with each Ladenko Classic cavity sliding door system
Fitting Instructions	Supplied with each unit
On-Site Installation	By special request: Sub-Contractor available
Technical Details	Contact: customer.support@ladenko.com.au
Pricing	Contact: sales@bandcdoors.com.au
Special Orders	Delivery of special orders is 8-10 days from signing of the production dimension sheet
Delivery	Australia wide

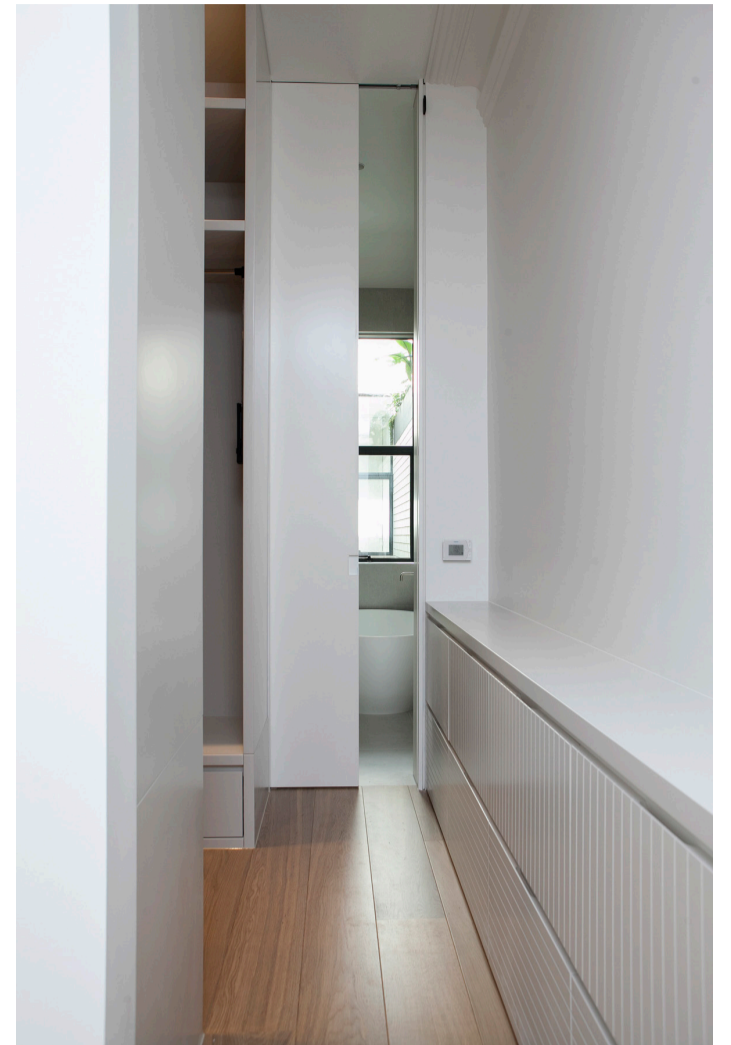

We focus on manufacturing premium quality flush finish cavity sliding door systems that are fully approved and tested. Backed by our technical support team and customer friendly sales staff together with a 10 year warranty.



The Ladenko cavity sliding door system is a fully approved, tested and recommended design, manufactured in Australia to certified design standards.

A WHOLE NEW WORLD OF SPACE SAVING INNOVATIVE POSSIBILITIES ARE WAITING FOR YOU

Contact us today: Telephone 1300 360 181 or sales@bandcdoors.com.au