

Type The **Ladenko ACCESS** Cavity Sliding Door System designed for disabled requirements.



General The Ladenko **ACCESS** cavity sliding door system has been especially designed for disabled people that have impairments such as: hand, wrist or arm disabilities due to reduced dexterity and strength including poor grip, weak arm muscles, poor balance or where getting close enough to reach the door handle may be difficult and is suitable for all domestic, commercial and industrial building projects.

Builders Many builders prefer to install the Ladenko cavity sliding door system because of its ease of installation which includes pre-cut and pre-drilled quality components, and smooth trouble free operation of the door system which ensures less 'on the job' installation time and better customer satisfaction.

Architects Whether your project is casual or urbane, sophisticated or contemporary or even heritage, we can assure you that our attention to detail results in a high quality product with an assurance of reliability. The Ladenko cavity sliding door system is a fully approved, tested and recommended design, manufactured in Australia to certified design standards.

Standard Sizes The Ladenko ACCESS cavity slider has been designed to comply with Australian Standard AS 1428.1-2009.

- Minimum clear opening of a doorway on a continuous accessible path of travel must be 850mm when measured from the edge of the opened door to the doorjamb (see figure 1)
- Door leaf needs to sit proud of the cavity to allow for a projecting handle to make it easy for the user to open/close (see figure 1)
- To suit 2040 high x 1020 wide x 35mm door size
- To suit 2115 high x 1950 wide stud opening

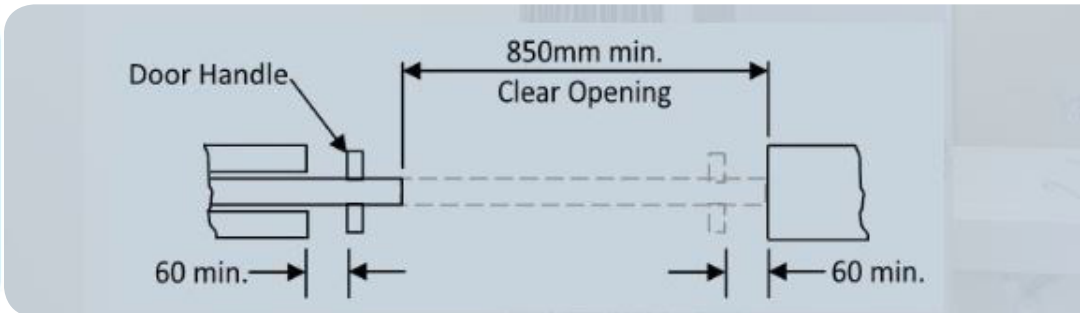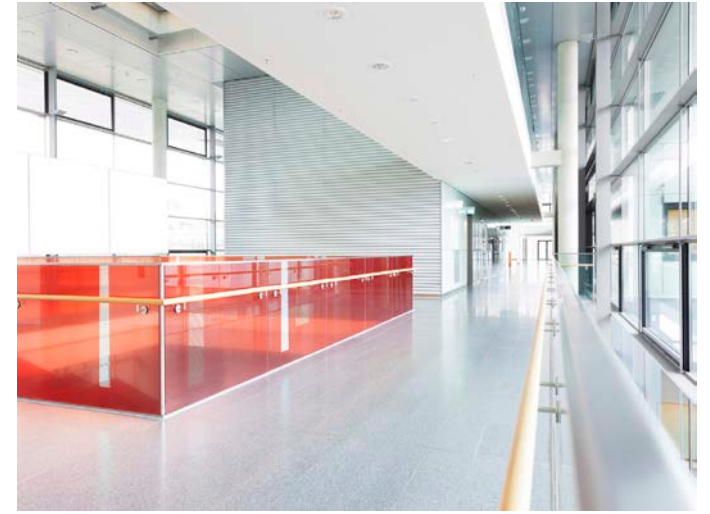

Custom Built Sizes Custom built sizes: please contact sales@ladenko.com.au

Door Weight ACCESS cavity slider is designed to carry doors as per Australian Standard AS 1428.1-2009.

Soft Closer Not available

Door Release Not available

Special Doors Doors to match the ACCESS cavity slider are available - special request

Head Track One piece heavy duty pre-drilled extruded aluminium dual rail track

Warranty 10 Years

Single or Double Only single doors available as per Australian Standard AS 1428.1-2009.

Trim Finish Architrave (standard)

No Closing Jamb Not available

EZY Jamb EZY Jamb is available - special request

Full Height Standard Height available

Pelmet Standard Pelmet

Door Protrusion Available as per Australian Standard AS 1428.1-2009.

Door Hardware Available as per Australian Standard AS 1428.1-2009.

Fitting Kit Installation/fitting kit supplied with each ACCESS cavity sliding door system

Fitting Instructions Supplied with each unit

On-Site Installation By special request: This can be arranged, contact: customer.support@ladenko.com.au

Technical Details Contact: customer.support@ladenko.com.au

Cost Contact: sales@ladenko.com.au

Special Orders Delivery of special orders is 8-10 days from signing of the production dimension sheet

Delivery Australia wide



Quick release hanger system plus pelmets pre-drilled and cut to length

Any size cavity sliding door system either single or double can be custom made for any application

End loading mounting plates make it quick and easy to fit and remove door

Single piece extruded aluminium head-track system ensures smooth and quiet operation

Full KDHW frame for strength and stability, quick and easy to install

Soft closer is available as an option for super quiet and gentle closing

Select varnish grade kiln dried Tasmanian hardwood jambs and pelmets

Aluminium or steel split jamb angle supports which can be fitted with optional brush seals if requested

Tescella heavy duty soft closer tested and approved

Standard door sizes range from 2040 x 520 up to 2040 x 1220. Special oversize inquiries are welcome

Builders prefer to install the Ladenko cavity sliding door system because of its quality components, ease of installation and smooth operation which ensures customer satisfaction. Each cavity sliding door pocket is made from select grade Tasmanian kiln dried hardwood, resulting in absolute quality and superior finish. Each cavity sliding door unit comes with a 10 year warranty.

Hercules 80 Roller Assembly

All Ladenko cavity sliding door systems can be manufactured to suit:

- Reveals and architraves
- EZY-Jamb flush trim kits
- P50 Shadow line or P25 stopping bead
- No closing jamb design

KDHW = Kiln dried hardwood

KDHW provides much better durability than pine or other soft woods and enhances stability in wet areas

The Ladenko cavity sliding door system is a fully approved, tested and recommended design, manufactured in Australia to certified design standards.

A WHOLE NEW WORLD OF SPACE SAVING INNOVATIVE POSSIBILITIES ARE WAITING FOR YOU

Contact us today: Telephone 1300 360 181 or sales@ladenko.com.au