

# SPACELINE™

## CUSTOM MADE CAVITY SLIDING DOORS SYSTEMS

Available in custom door sizes up to 2500mm high x 1220mm wide

1300 360 181

Australia wide delivery



# SPACELINE™

## Architectural Custom Cavity Sliding Door System

The SPACELINE is a architectural cavity sliding door system with the capacity to carry a door weighing **80 - 100kg**. Manufactured from select grade KDHW and supplied with a robust extruded aluminium head track and is suitable for all domestic and commercial building projects.

- Standard door height of 2040 or 2340mm available
- Custom made sizes available up to 2500 x 1220mm
- Available as single or double door
- Maximum door weight 80 - 100kg
- Made for standard 90mm stud wall
- To suit 10 or 13mm wall lining thickness
- Flush door finish
- Architrave, Square set & P50 Shadow Line trim

### ACCESSORIES

Soft Closer  
Jexis Door Release  
Tescella Doors available




# SPACELINE™

## CUSTOM MADE CAVITY SLIDING DOORS SYSTEMS

### SPACELINE™ SINGLE DOOR


Available in custom made sizes up to 2500 x 1220mm

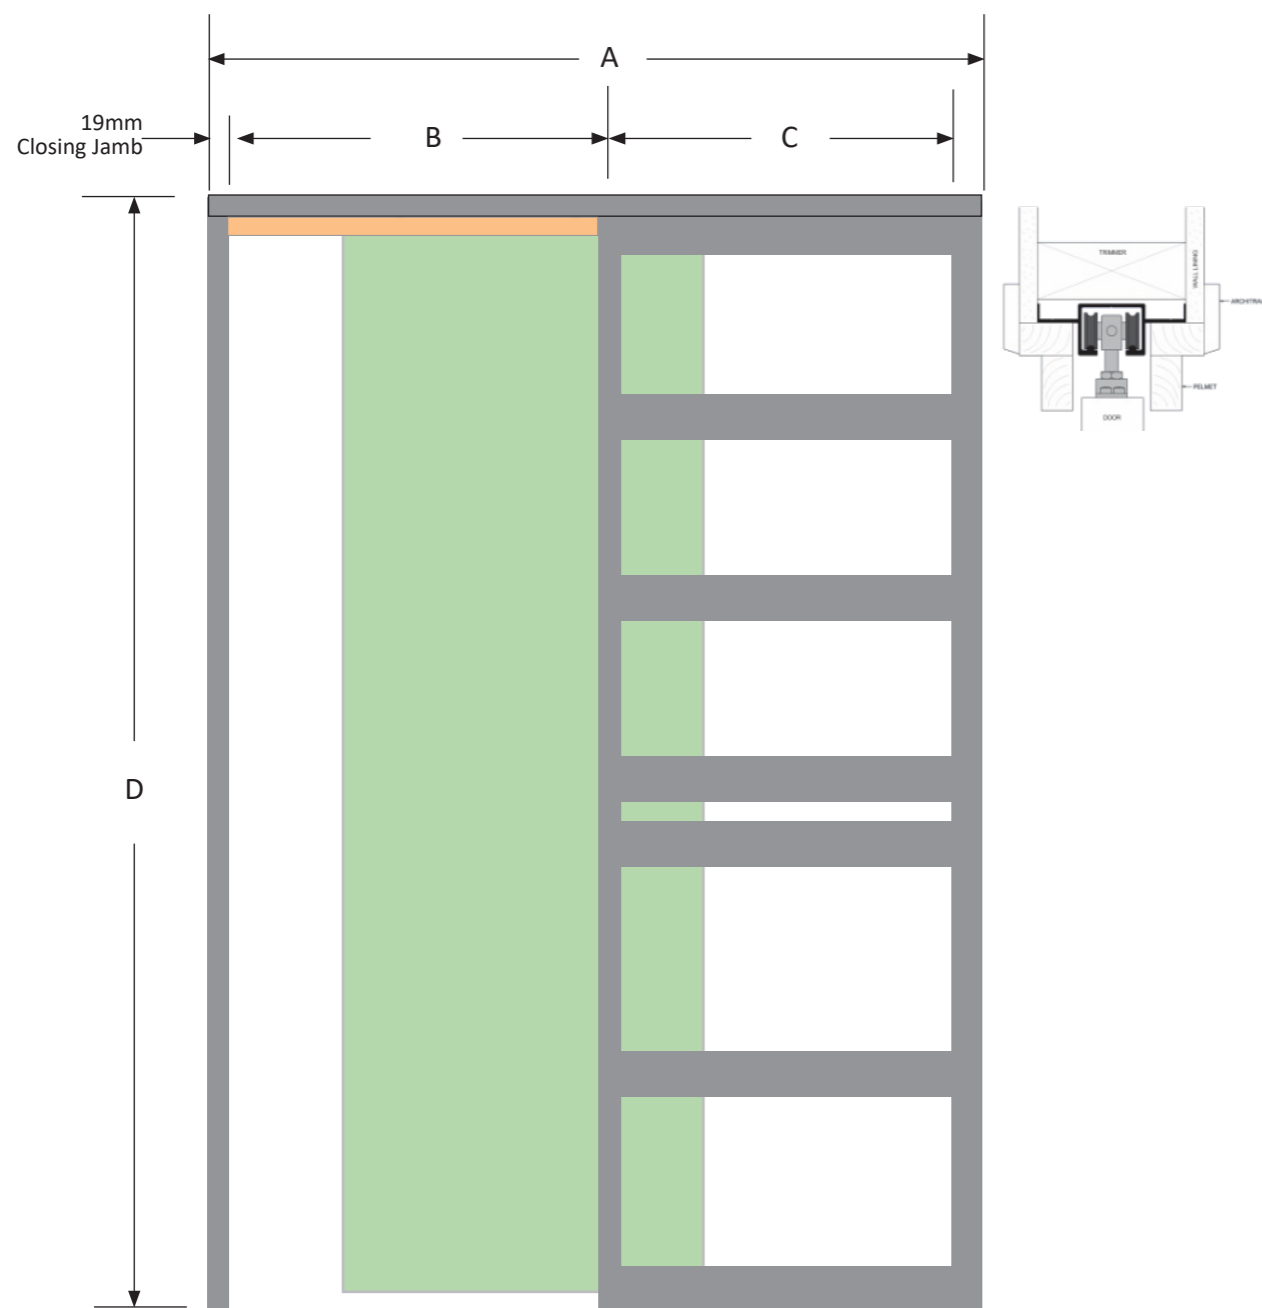

- A = Overall Frame Width
- B = Clear Walk Through Area
- C = Cavity Pocket Depth
- D = Frame Height

### SPACELINE™ DOUBLE DOORS

Available in custom made sizes up to 2500 x 1220mm

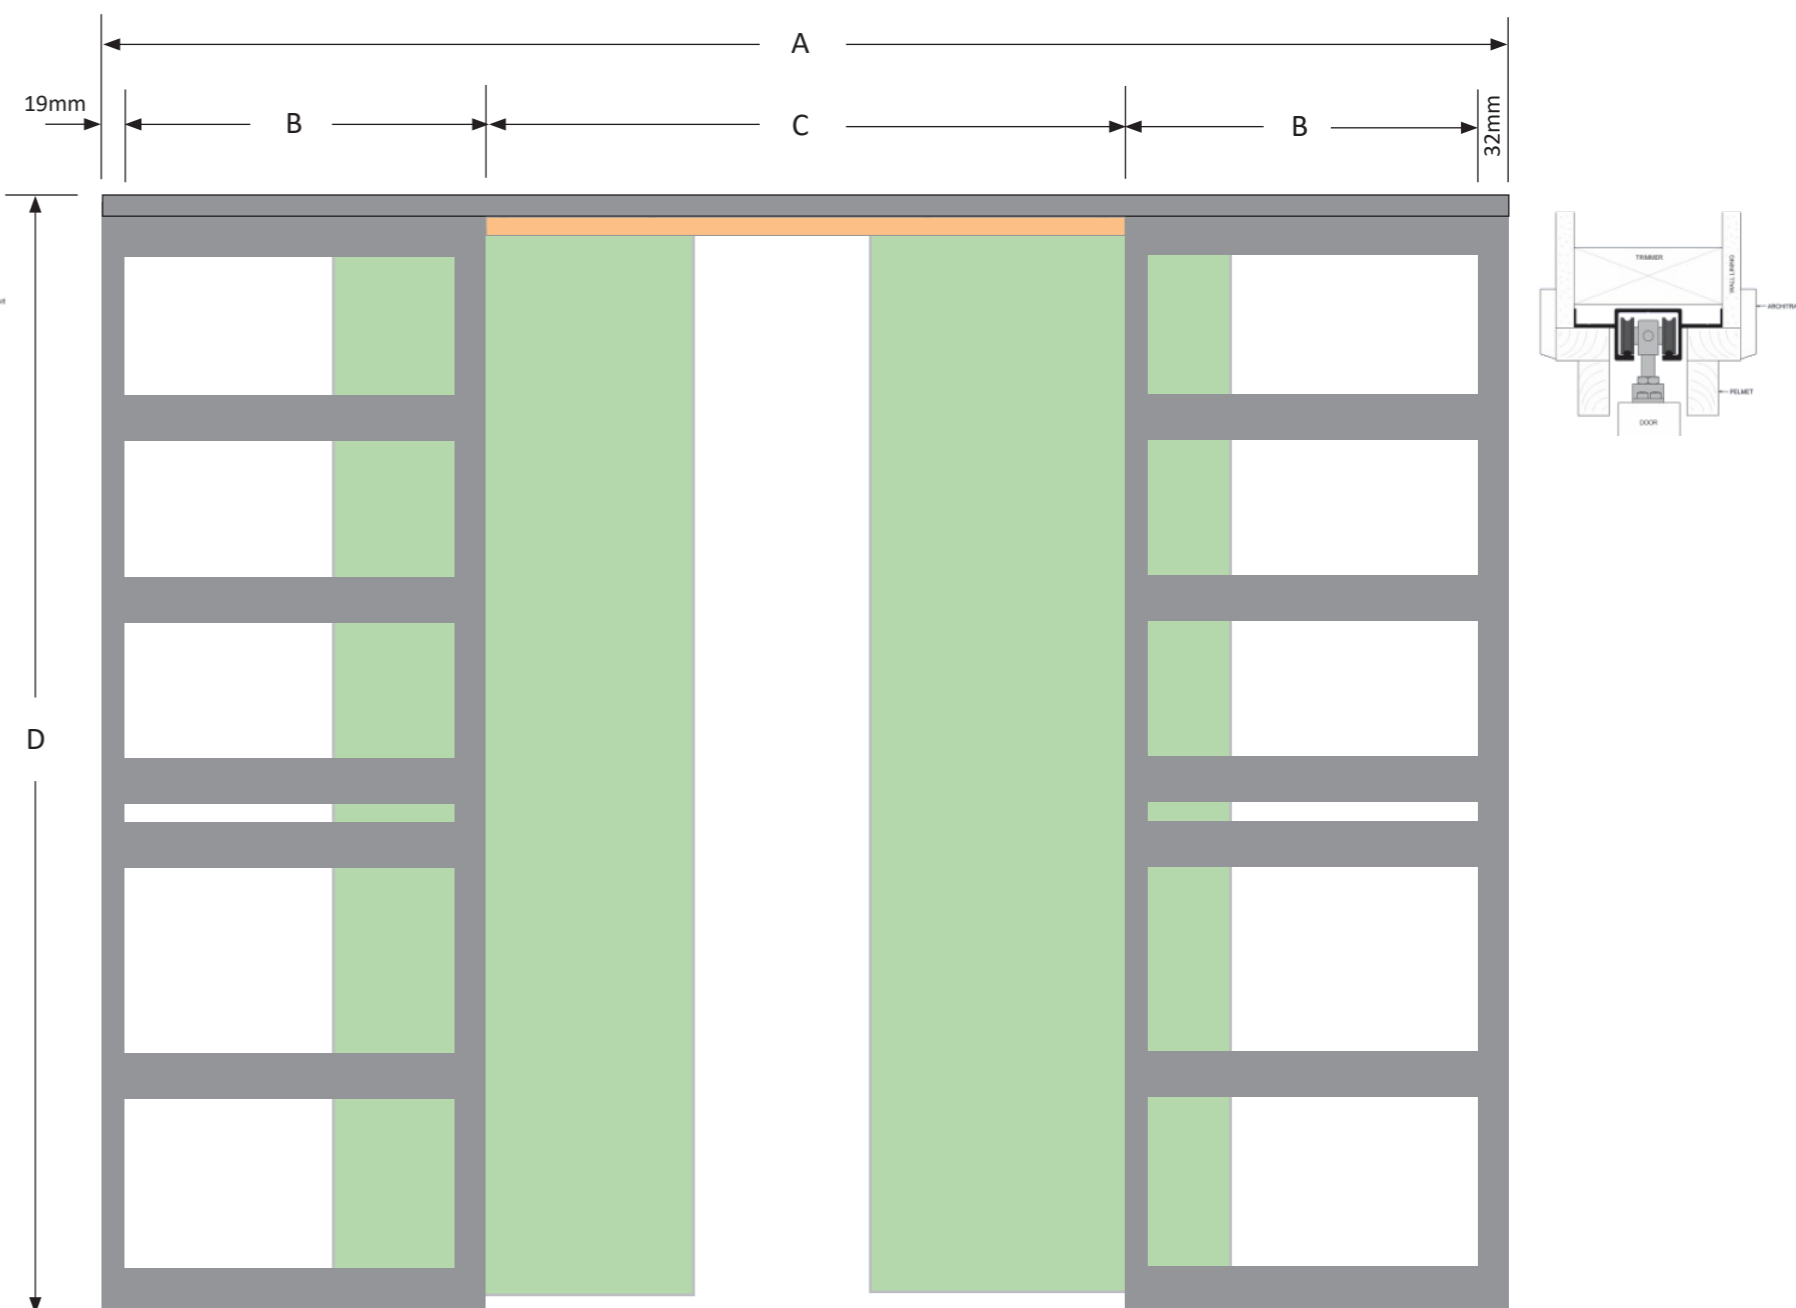

- A = Overall Frame Width
- B = Cavity Pocket Depth
- C = Clear walk through area
- D = Frame Height

# SPACELINE™

## CUSTOM MADE CAVITY SLIDING DOORS SYSTEMS

Available in custom door sizes up to 2500mm high x 1220mm wide

### STANDARD SIZES

FOLLOWING TABLE TO SUIT DOORS 2040 HIGH

DOOR SIZE	SINGLE DOOR STUD OPENING HEIGHT & WIDTH	DOUBLE DOOR STUD OPENING HEIGHT & WIDTH
2040 x 520 x 35mm	2115 x 1100mm	2115 x 2140mm
2040 x 620 x 35mm	2115 x 1300mm	2115 x 2540mm
2040 x 720 x 35mm	2115 x 1500mm	2115 x 2940mm
2040 x 770 x 35mm	2115 x 1600mm	2115 x 3140mm
2040 x 820 x 35mm	2115 x 1700mm	2115 x 3340mm
2040 x 870 x 35mm	2115 x 1800mm	2115 x 3540mm
2040 x 920 x 35mm	2115 x 1900mm	2115 x 3740mm
2040 x 1020 x 35mm	2115 x 2100mm	2115 x 4140mm
2040 x 1070 x 35mm	2115 x 2200mm	2115 x 4340mm
2040 x 1200 x 35mm	2115 x 2460mm	2115 x 4840mm
2040 x 1220 x 35mm	2115 x 2500mm	2115 x 4940mm

### STANDARD SIZES

FOLLOWING TABLE TO SUIT DOORS 2340 HIGH

DOOR SIZE	SINGLE DOOR STUD OPENING HEIGHT & WIDTH	DOUBLE DOOR STUD OPENING HEIGHT & WIDTH
2340 x 520 x 35mm	2415 x 1100mm	2415 x 2140mm
2340 x 620 x 35mm	2415 x 1300mm	2415 x 2540mm
2340 x 720 x 35mm	2415 x 1500mm	2415 x 2940mm
2340 x 770 x 35mm	2415 x 1600mm	2415 x 3140mm
2340 x 820 x 35mm	2415 x 1700mm	2415 x 3340mm
2340 x 870 x 35mm	2415 x 1800mm	2415 x 3540mm
2340 x 920 x 35mm	2415 x 1900mm	2415 x 3740mm
2340 x 1020 x 35mm	2415 x 2100mm	2415 x 4140mm
2340 x 1070 x 35mm	2415 x 2200mm	2415 x 4340mm
2340 x 1200 x 35mm	2415 x 2460mm	2415 x 4840mm
2340 x 1220 x 35mm	2415 x 2500mm	2415 x 4940mm

#### CAVITY SLIDER FORMULA SHEET – SPACELINE

##### SINGLE UNITS

Clear (walk through) opening = Door Width - 20mm  
 Cavity Depth = Door Width + 40mm  
 Overall Height = Door Height + 60mm  
 Overall Width = Door Width x 2 + 40mm  
 Width of Closing Jamb = Stud Thickness + Lining (both sides) + 2mm  
 Floor to Reveal Dimension = Door height + 31mm  
 Stud Opening Height = Door Height + 75mm  
 Stud Opening Width = Door Width x 2 + 60mm

##### DOUBLE UNITS

Clear (walk through) opening = 2 x Door Width - 40mm  
 Cavity Depth = Door Width + 40mm  
 Overall Height = Door Height + 60mm  
 Overall Width = Door Width x 4 + 40mm  
 Overall Thickness = Stud Thickness + Lining (both sides) + 2mm  
 Floor to Reveal Dimension = Door height + 31mm  
 Stud Opening Height = Door Height + 75mm  
 Stud Opening Width = Door Width x 4 + 60mm

#### Custom Built Sizes

Soft Closer

Door Release

Head Track

Warranty

Single or Double

Trim Finish

No Closing Jamb

Pelmet

Door Protrusion

Fitting Kit

Technical Details

Special Orders

Custom built sizes are available in any height and width for single or double doors

Available

Available, Jexis door release

Heavy duty pre-drilled extruded aluminium duel rail track, rated at 80 - 100kg

10 Years

Both single and double cavity sliders are available in standard sizes, see the above table

Architrave and Square Set

Available - special request

Yes, depth is 30mm and pre-drilled

Zero, in fully open position. 60mm protrusion available if requested

Installation/fitting kit supplied with each Hercules cavity sliding door system

Contact: [customer.support@ladenko.com.au](mailto:customer.support@ladenko.com.au)

Delivery of special orders is 8-10 days from signing of the production dimension sheet



EXCELLENCE IS EXPECTED

