

ALPRO - 60 Flush & Clean Appearance


Standard Sizes | 60kg door weight | 90mm stud size | Architrave Finish | Square Set Finish | P50 Shadowline Finish



The Ladenko Alpro 60 does not have pelmets and is available in standard door sizes only and the cavity frame is made to suit a 90mm stud wall. The head track is made from extruded aluminium and is designed to carry a maximum door weight of up to 60kg.

The Ladenko Alpro 60 is a top hung, aluminium track system for straight sliding doors up to 60kg either single or double doors. The easy to install hanger plates are discreetly concealed inside the top of the door meaning there is minimal clearance between the top of the door and the head track which makes it a stylish solution for residential and commercial installations. The Alpro 60 can also be supplied with a soft closer and a Jexis door release as accessories

For larger doors you can request the Ladenko Classic Zero Clearance 80kg and 120kg system.

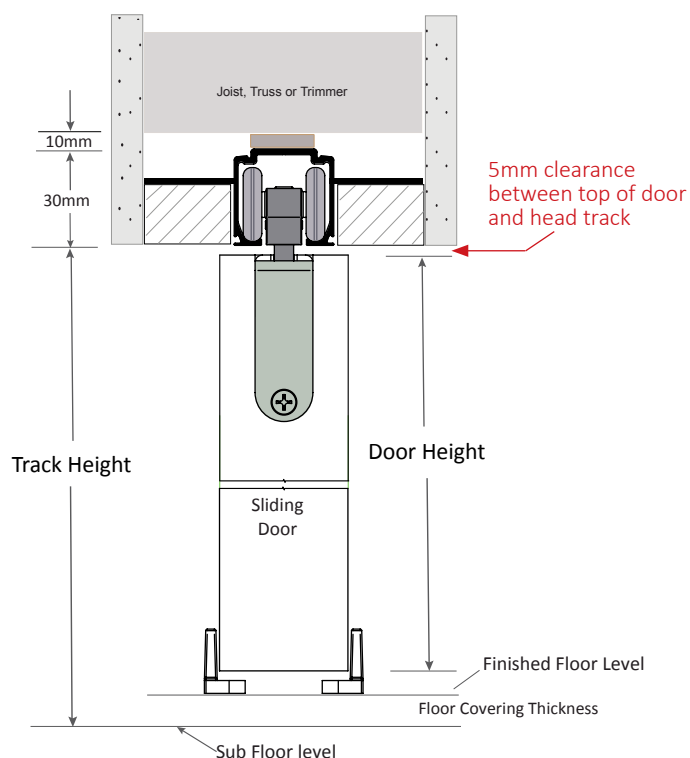


Available in standard sizes only and does not need a pelmet. Close clearances provides a flush and clean appearance.

ALPRO - 60 Technical Information

We offer the **Ladenko Alpro 60** in all the standard sizes together with a flush door design, soft closer and push to open button.

At a Glance:
 Max Door Weight: 60kg
 Max Door Width: 1020mm
 Max Door Height: 2340mm
 Min Door Thickness: 35mm

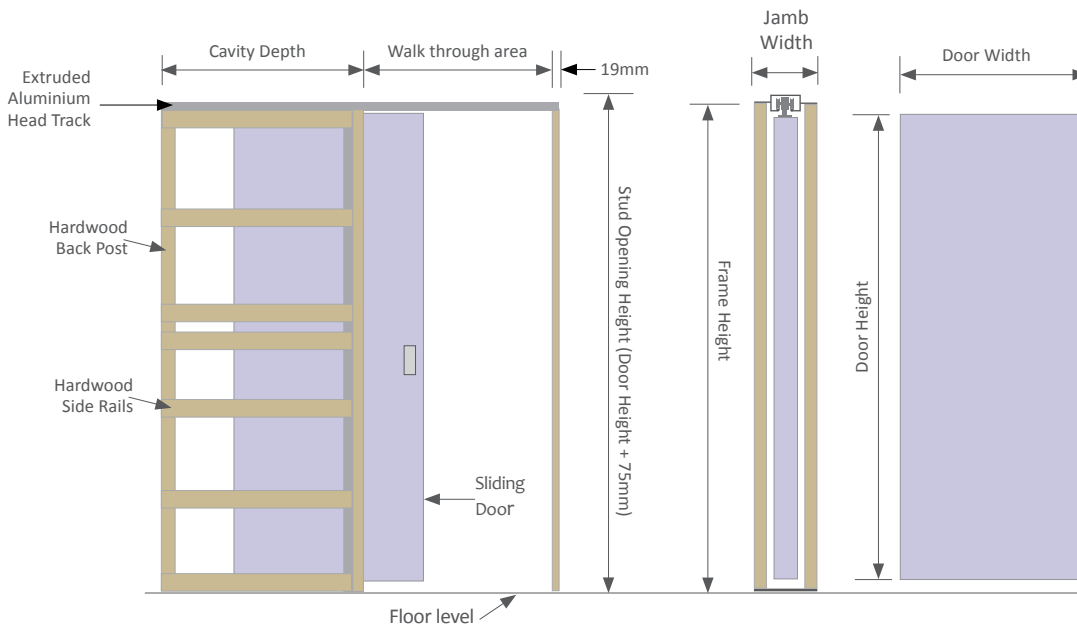

PLEASE NOTE
 Door leaf not included as part of the cavity sliding door pocket. Can be supplied separately.

Please Note: If your door weighs more than 60kg please see our **Classic Zero Clearance** range

Ladenko Standard Cavity Sliding Door Size and Stud Opening Data					
Door Size W x H	Single Stud Opening H x W	Double Stud Opening H x W	Door Size H x W	Single Stud Opening H x W	Double Stud Opening H x W
2040 x 520	2115 x 1100	2115 x 2140	2340 x 520	2415 x 1100	2415 x 2140
2040 x 620	2115 x 1300	2115 x 2540	2340 x 620	2415 x 1300	2415 x 2540
2040 x 720	2115 x 1500	2115 x 2940	2340 x 720	2415 x 1500	2415 x 2940
2040 x 770	2115 x 1600	2115 x 3140	2340 x 770	2415 x 1600	2415 x 3140
2040 x 820	2115 x 1700	2115 x 3340	2340 x 820	2415 x 1700	2415 x 3340
2040 x 870	2115 x 1800	2115 x 3540	2340 x 870	2415 x 1800	2415 x 3540
2040 x 920	2115 x 1900	2115 x 3740	2340 x 920	2415 x 1900	2415 x 3740
2040 x 1020	2115 x 2100	2115 x 4140	2340 x 1020	2415 x 2100	2415 x 4140

Features and Benefits of the Ladenko Architectural Cavity Sliding Door System

- Our frames are available in standard heights & widths, for any project
- Recommended design, fully approved and tested. Quick and easy to install
- Quality quick release hanger system pre-drilled and cut to length
- Finished as Architrave, Square Set and P50 shadowline
- Quality components and construction. Select grade timber frame & jamb
- Constructed from select grade timber
- Standard 90mm wall framing.
- Single piece extruded aluminium head-track ensures smooth and quiet operation
- Reinforced 4 wheel door hanger carriage system

Maximum
60kg
 Door Weight